



TLA229 PHONE

Protection mode:

Type of protection: EExem[ib]IIBT5/ATEXII2GD
 Class of temperature: T5
 Protection degree: IP66
 Ambient Temp : -40°C/+60°C
 Zones : 1,2,21,22




Description:

Explosion-proof EEx IP66 telephone for wall mounting, indoor and outdoor, for industrial and noisy environments. Low energy consumption with maximum power, a receiver adaptable to different environments, a hands-free version, a high degree of water tight protection and high shock resistance, optional IP version, choose this explosion-proof telephone229.

Technical data:

- Body material / color: polyester plastic / RAL2003
- Handset material / color: polyester plastic / black
- Handset cord: stainless steel 100 kg resistance
- Loudspeaker (hands-free)/microphone: vandal resistant / 5W > 78 db at 1 m
- Mounting: on wall (2 or 4 fixing holes)
- Termination: inside screw connections
- Dimensions: 201 x 320 x 113 mm
- Weight: 2.4 kg
- IP-rating: IP66
- Impact rating (IK): 10
- Maintenance: all circuits and control devices are fixed on the easily removable front plate for a very quick substitution of equipment in the field.

Technical drawing:

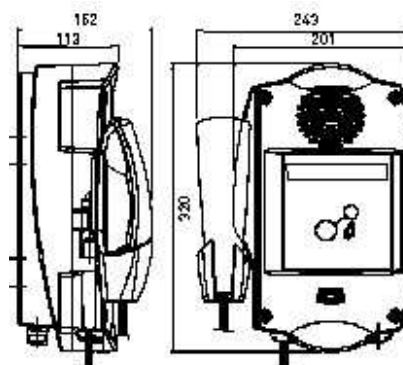

Models:

Model	Handset	Hands-free	Display	Keyboard & memory	1 button	Flashing beacon	Remote diagnostics
TLC229A1	●						●
TLA229A1	●			●			●
TLS229A1C9G	●	●		●			●
TLS229A1C9FGL	●	●	●	●		●	●
TLS229A1C9FL		●	●	●		●	●
TLS229A1B		●			●		●