


Space Heater

KSH Series



Part Number Description


KSH - 1 2

1 Supply Voltage	1 : 110VAC	2 : 220VAC	3 : 380VAC	
2 Output Power	03 : 30W	05 : 50W	08 : 80W	10 : 100W
	15 : 150W	20 : 200W	30 : 300W	40 : 400W

General Specification

Material	Aluminium, Anodize
Connection Casing	Ceramic + Terminal
Mount	Panel Mounting
Insulation Resistance	100M Ω 500VDC
Dielectric Strength	2,000VAC 1 minute
Ambient Temperature	-45 to +70°C (With no icing)
Ambient Humidity	50 - 95% RH


Product Selection

	Supply Voltage	Output Power	Part Number	Guard*	Supply Voltage	Output Power	Part Number	Guard*
	110VAC	30W	KSH-103	KSH-G3	220VAC	30W	KSH-203	KSH-G3
		50W	KSH-105			50W	KSH-205	
		80W	KSH-108			80W	KSH-208	
		100W	KSH-110	100W		KSH-210	KSH-G2	
		150W	KSH-115	150W		KSH-215		
		200W	KSH-120	200W		KSH-220		
		300W	KSH-130	KSH-G1	300W	KSH-230	KSH-G1	
		400W	KSH-140		400W	KSH-240		
					380VAC	200W	KSH-320	KSH-G2

* Guard is not included in the product as a optional accessory.

Dimension

unit : mm

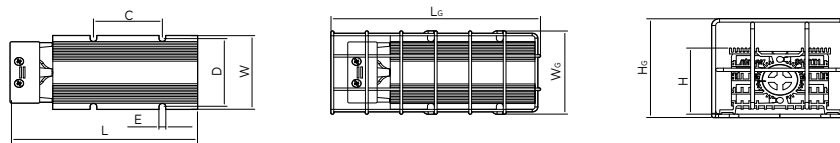

Model	Guard	Output Power	Body			Guard			Mounting Hole		
			L	W	H	LG	WG	HG	C	D	E
KSH-□03/05	KSH-G3	30W 50W	140	62	42	150	70	65	50	57	Ø5
KSH-□08/10/15/20	KSH-G2	80W 100W 150W 200W	190	62	42	200	70	65	75	57	Ø5
KSH-□30/40	KSH-G1	300W 400W	340	62	42	350	70	65	150	57	Ø5